


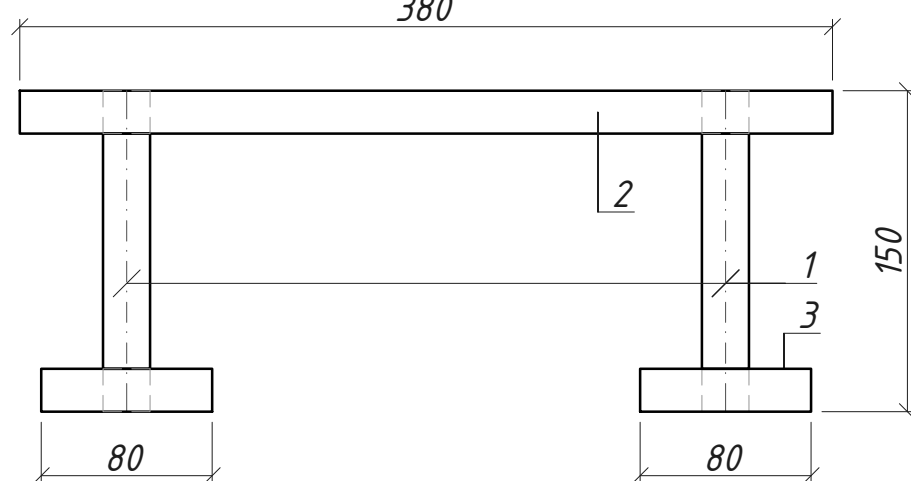

Technical drawing of a square plate with four corner holes. The overall dimensions are 380 mm by 380 mm, indicated by dimension lines on the right and bottom. The distance between the centers of the holes is 280 mm, shown by a horizontal dimension line at the bottom. Each corner hole has a width of 50 mm and a height of 50 mm, as indicated by dimension lines on the right and bottom. The holes are positioned such that their centers are 165 mm from the nearest edges (380 mm / 2 - 50 mm / 2 = 165 mm). Dashed lines represent the centerlines of the holes and the overall square.

Technical drawing of a mechanical part. The part is symmetrical about a vertical centerline. The total width is 24 ± 2 . The width of the central rectangular section is 22. The top surface is inclined at an angle of $50^\circ \pm 5^\circ$. The height of the central section is 18. The total height of the part is 20. The bottom surface is flat. The part is shown with hatching to indicate its cross-section.

Поз.	Обозначение	Наименование	Кол.	Масса ед. кг	Примечание
		Закладная деталь 3д-до		28.15	
1	ГОСТ 34028-2016	Ø20 А 400 L=150	4	0.37	1.48
2	ГОСТ 82-70	-20 x 380 L=380	1	22.67	22.67
3	ГОСТ 103-2006	-20 x 100 L=80	4	1.00	4.00
		Сварка 15%			0.42

1. Размеры на чертеже в мм;
2. Арматурная сталь класса А 400 марки 25Г2С. Прокат марки Ст3сп5;
3. Объемы даны на одну закладную деталь 3д-до. Общее количество на сооружение - 26 шт.

						МП-1/26-ТКР-МП			
						«Капитальный ремонт моста через р. Казачек в селе Чмыровка»			
Изм.	Кол. уч.	Лист	№ док.	Подп.	Дата				
Разраб.		Чемарин				Мост через р. Казачек Часть 2. Пролетное строение	Стадия	Лист	Листов
							Р	11	1
ГИП		Семенов				Закладная деталь 3д-мод		АО "Институт проектирования транспортных сооружений"	
Н.контр.		Красавин							
					2026				