VIBRATING SCREEN FOR CASTING SLIP


VBL 900 - 1200 - 1500 1/X


TECHNICAL FEATURES				
DATA	U.M.	1500	1200	900
Number screening nets	no.	1		
Screening surface	m²	1.575	0.932	0.587
Power	kW	2.75	1.25	0.73
Centrifugal force	N	21,582	12,753	6,867
Motorised vibrator	Type	MV 155/4	MV 145/4	MV 125/4
Weight	kg	230	145	105



STRUCTURAL FEATURES

- AISI 304 stainless steel base, with ABS inspection door
- Parts in contact with the product: AISI 304 L – roughness ≤ 0.5 Raμ
- Protection rating: IP65
- Upper anti-splash strip
- Clamping system: half-rings with bolts
- Galvanised steel diffuser with PA cone

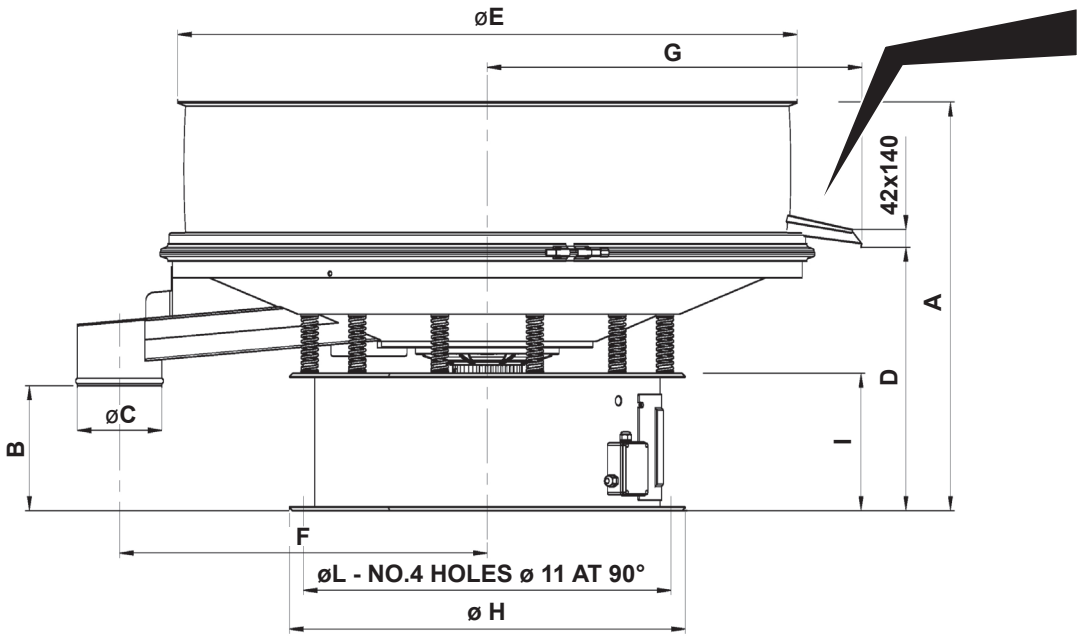

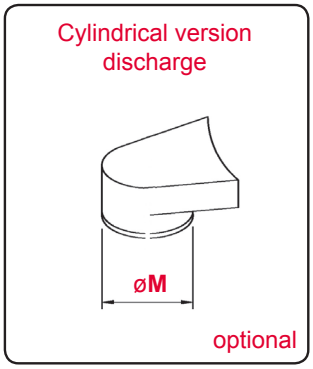

Mod./Size	A	B	øC	D	øE	F	G	øH	I	øL	øM
900 1/X	817	298	101.6	526	911	525	608	741	315	680	160
1200 1/X	915	319	139.7	571	1125	587	715	741	315	680	160
1500 1/X	1077	406	200	733	1465	870	889	937	380	870	200

USE

- Screening of ceramic casting slips

ACCESSORIES AND VERSIONS

- Quick-coupling diffuser, protected against incrustations

The information is approximate - The guaranteed values are released by Vibrotech s.r.l. on request-It is forbidden to reproduce the document even partially.

VIBROTECH S.r.l.
Sede Legale: Via Racchetta, 2 - int. 20 - 42019 Sassuolo (MO)
Sede Operativa: Via Don Pasquino Borghi, 4 - 42013 S. ANTONINO DI CASALGRANDE (RE) - Italy
Tel. +39 0536 82.37.76 - Fax +39 0536 81.20.09 - www.vibrotech.biz - email: info@vibrotech.biz
R.E.A. di Mo 407988 - C.F. e Partita IVA 03674210368

VIBROTECH™